


Cable Lashing Equipment

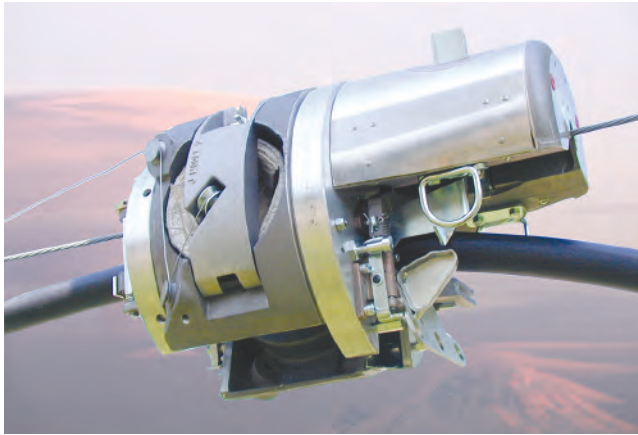


J2 CABLE LASHER

- Lashes single or multiple cables up to 3 in. (76 mm) in diameter on 1/4 to 7/16 in. (6-11 mm) strand. A factory modification allows lashing to 1/2 in. (12.7 mm) strand
- Holds two 1200 ft. x 0.045 in. (365 m x 1.1 mm) coils, two 1600 ft. x 0.038 in. (488 m x 1.0 mm) coils, or two 450 ft. x 0.065 in. (135 m x 1.6 mm) coils of lashing wire
- Uses an automatic drum lock for easy span transfers
- Positive internal gear to gear mechanism with no chains or belts to slip
- Comes with a storage case and 6 ft. (1.6 m) Bridle Rope with snap hooks

NOTE: Weights below do not include bridle and storage case.

P/N	Description	Weight (kgs)
86070	J2 Lasher Cable .045"	46 lbs (20.9)
86071	J2 Lasher Cable .065"	46 lbs (20.9)
86072	J2 Lasher Cable .045" w/Steel Wheels	46 lbs (20.9)
86074	J2 Lasher Cable .045" w/o Strand Lock	46 lbs (20.9)
03165	Bridle Rope Assy 6' (1.6 m)	3 lbs (1.4)
08189	J2 Lasher Storage Case	19 lbs (8.7)
70012	J2 Lasher Guard Halo	3 lbs (1.4)

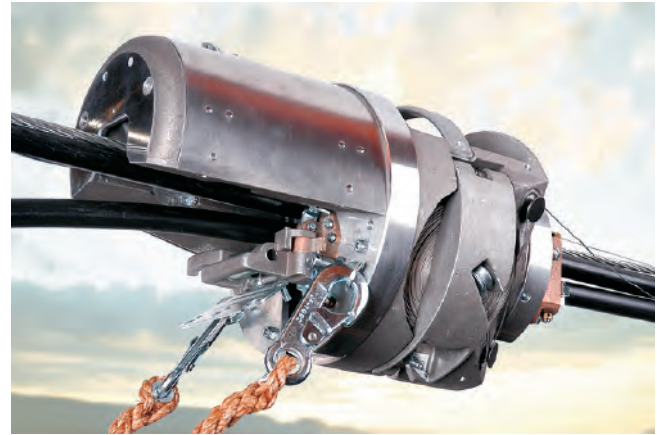

C2 CABLE LASHER

- Lashes single or multiple cables up to 1-7/8 in. (46 mm) in diameter on 1/4 to 3/8 in. (6-10 mm) strand
- Holds two 1200 ft. x 0.045 in. (365 m x 1.1 mm) coils or two 1600 ft. x 0.038 in (488 m x 1.0 mm) coils of lashing wire
- Uses an automatic drum lock for easy span transfers.
- Positive internal gear to gear mechanism with no chains or belts to slip
- Comes with a storage case and 6 ft. (1.6 m) Bridle Rope with snap hooks

NOTE: Weights below do not include bridle and storage case.

P/N	Description	Weight (kgs)
71422	C2 Lasher Cable .045"	35 lbs (15.9)
71424	C2 Lasher Cable .045" w/o Strand Lock	35 lbs (15.9)
03165	Bridle Rope Assy 6' (1.6 m)	3 lbs (1.4)
07143	C2 Lasher Storage Case	11 lbs (5.0)
70011	C2 Lasher Guard Halo	3 lbs (1.4)



Lasher Guard "Halo"